
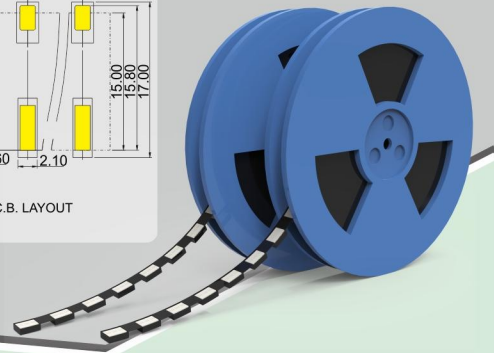
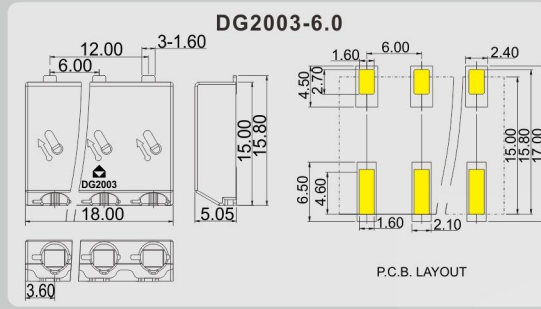


DG2001-3.0/ DG2003-6.0

APPROVAL:  


- 插入式弹簧结构设计, 接线更快速。
- 耐高温材料, 可采用SMT回流焊接。
- 紧凑型结构设计, 高度仅2.6mm/5.5mm。
- 0.14mm²-0.34mm²/0.2mm²-1.5mm²线径可供选择。
- Push-in design ,faster connection.
- Heat-resistance material,suitable for SMT soldering.
- Compact design,the height is as low as 2.6/5.5mm.
- Wire range 0.14mm²-0.34mm² /0.2mm²-1.5mm².

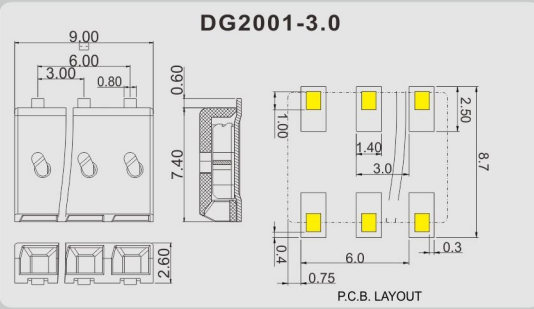

技术参数 Technical Data

型号 Model	线径 Wire range	线数 Poles	IEC60947-7-4技术参数 (IEC60947-7-4 datasheet)		UL1977技术参数 (UL1977 datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG2001-3.0	0.14-0.34mm ² /26-22AWG/SOL	01-03P	160V	3A	250V	3A
DG2003-6.0	0.2-1.5mm ² /24-16AWG/SOL	01-03P	320V	17.5A	300V	10A

产品附件 Product Accessory


型号/Model	线数/Poles	用途/Appliction field	图片/Figure
DG028	1P	取线工具/Tool	

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DG2001-3.0	2059	—
DG2003-6.0	2061	—

应用行业 Application

LED照明行业
LED lighting

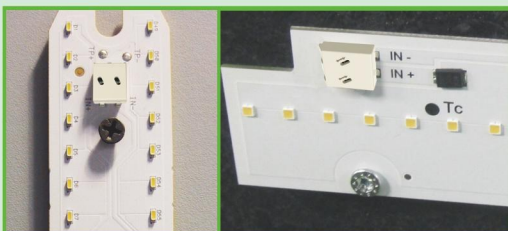

产品订货 How to order

DG2001-3.0/DG2003-6.0	X	X	P	1	1	0	0	AH
Series No.	No. of Pole			Pitch		Standard		
				1	2	General Color		
				1	2	Grey	PANTONE 429C	DEGSON 41

产品包装方式 Packing

Product model	Pcs./Pkt.	Pcs./Carton	Product model	Pcs./Pkt.	Pcs./Carton
DG2001-3.0-01P	2650	31800	DG2003-6.0-01P	900	8100
DG2001-3.0-02P	1750	21000	DG2003-6.0-02P	700	6300
DG2001-3.0-03P	1750	21000	DG2003-6.0-03P	450	4050