
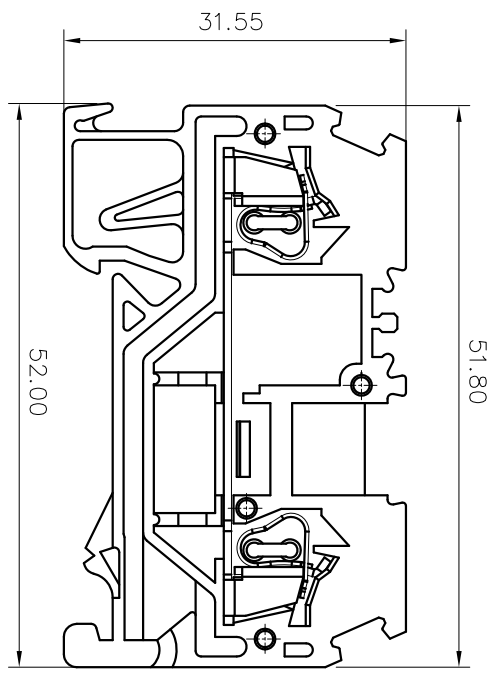



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

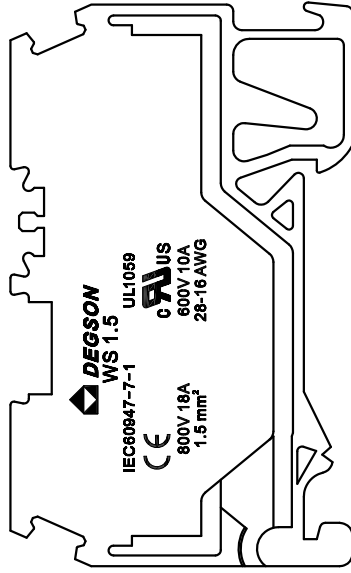

NOTES:
UL Standard

1. Rated voltage/current : 600V / 10A
2. Withstanding voltage : AC2200V/1Min.
3. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800 V
Rate current(A)	18 A


2. Wire range : 0.2~1.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 4mm, Poles : 01P
3. Stripping length : 9~10mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range	in mm		Nominal dimension		range
	mm	in	mm	in	
Over 10	10	TO	Over 30	Over 100	Over 150
TO 10	TO	TO	TO 30	TO 100	TO 150
6 TO 10	24	30	60	100	150
±0.15 ±0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30					
±2°					

6. RoHS Compliance

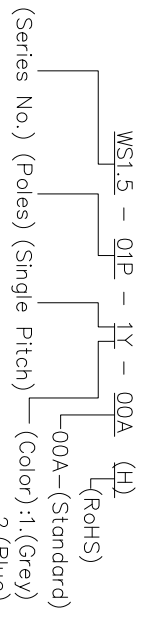

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		REV	DO
		SHEET	1/1
		SCALE	1:1