
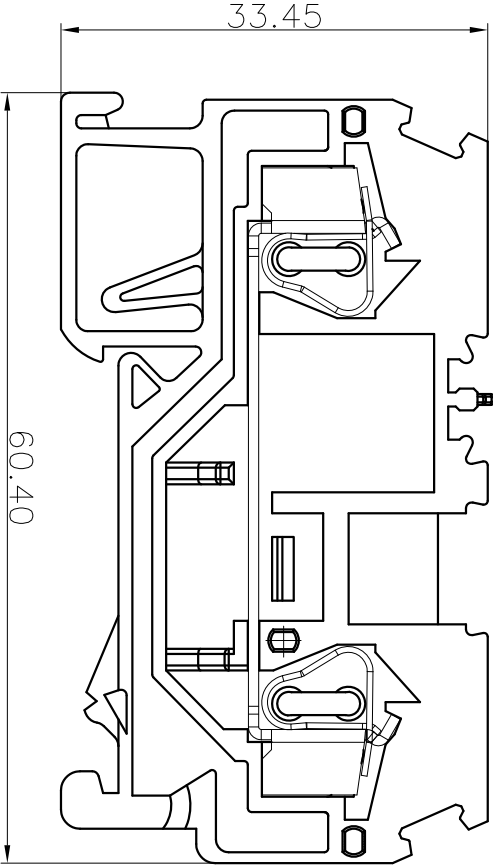



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

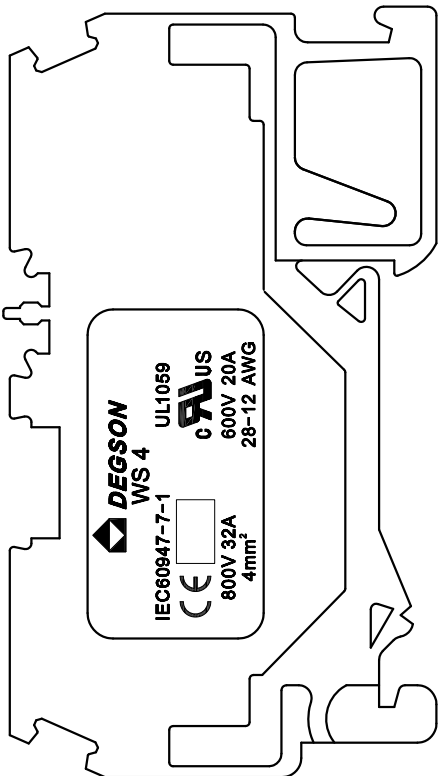

IEC Standard	Pollution degree	3
1.	Overvoltage category	III
	Rate impulse voltage(KV)	8.0KV
	Rate voltage(V)	800 V
	Rate current(A)	32 A


- NOTES:
- UL Standard
 - 1.Rated voltage/current : 600V / 20A
 - 2.Withstanding voltage : AC2200V/1Min.
 - 3.Wire range : 28~12AWG

- 2.Wire range : 0.2~4.0mm²

- NOTES2:
- 1.Dimension shall be interpreted per ASME Y14.5-2009
 - 2.Pitch : 6.2mm, Poles : 01P
 - 3.Stripping length : 10~11mm
 - 4.Operating temperature: -40°C~+105°C
 - 5.Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	mm
Over	10	Over	100	Over
TO	60	TO	100	TO
TO	10	TO	150	TO
TO	24	TO	60	TO
TO	30	TO	100	TO
TO	10	TO	150	TO
±0.15	±0.20	±0.30	±0.50	±0.70
±1.00	±1.30	±1.00	±1.30	±2.0

6.RoHS Compliance

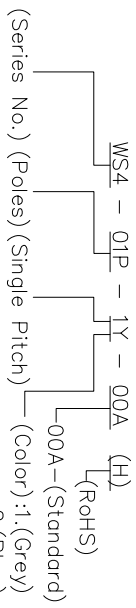

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		REV	DO
		SHEET	1/1
		SCALE	1:1