
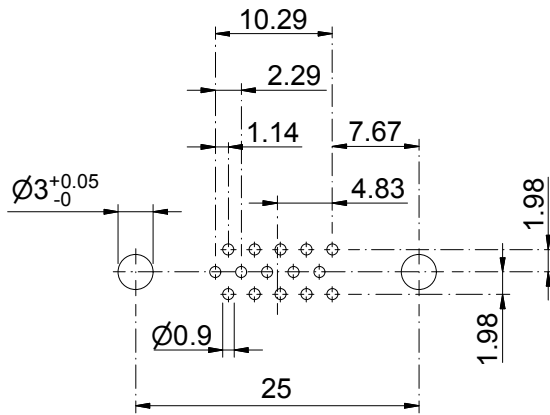
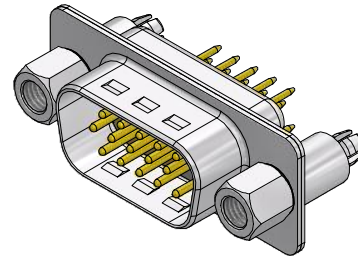
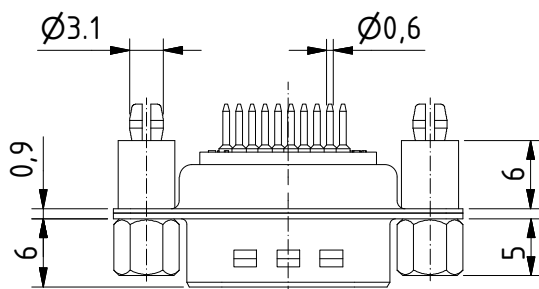



RoHS compliant

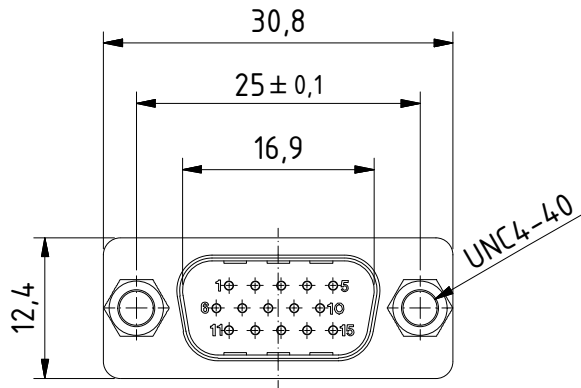

PCB Layout tolerances +/-0.1

General tolerances (Delttron standard)			
size in mm	> 0.5	> 3	> 30
up to 3	up to 6	up to 30	up to 120
tolerances			
±0.1	±0.2	±0.2	±0.3

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 3A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

modification	Rev. a) 13.12.2009 mr	Rev.	Rev.	DE009557		
	Rev.	Rev.	Rev.	part no.		
HD-D15PY/2M86UNB5	1.5:1 scale	drawn	22.10.2008	mr		
		checked				
		approved				
 Industrie Neuohof 8c CH-3422 Kirchberg				K060386 a drawing no.		