
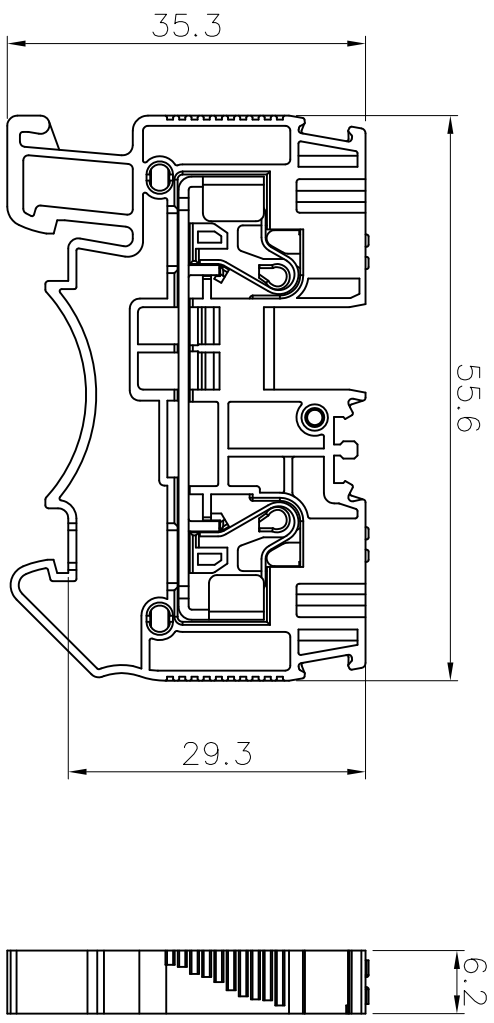



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

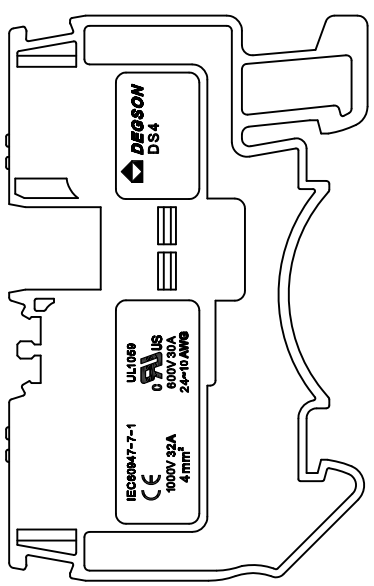

NOTES1:

UL Standard

1. Rated Voltage/Current : 600V / 30A

2. Withstanding Voltage : AC2200V/1Min.

3. Wire Range : 24~10AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	1000V
Rate Current(A)	32A

2. Wire Range : 0.2~4mm²&6mm²(sol)

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009

2. Pitch : 6.2mm, Poles : N=01P


3. Stripping length : 10-12mm

4. Operating temperature: -40°C~+105°C

5. Undimensioned Tolerances:

Pitch Range in Nominal Dimension Range		In mm		Over	Over	Over	Over
mm	mm	mm	mm	mm	mm	mm	mm
6	10	30	60	100	150	0.1/10	
TO	TO	TO	TO	TO	TO	≤	
10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
						±2°	

6. RoHS Compliance

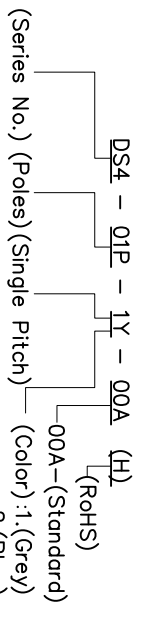

- (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	DS4-01P-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		THIRD ANGLE PROJECTION	SCALE