
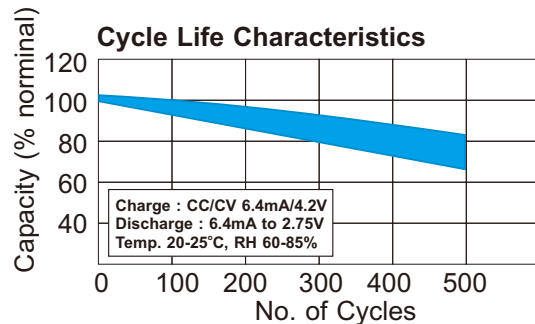
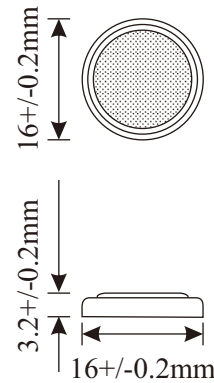
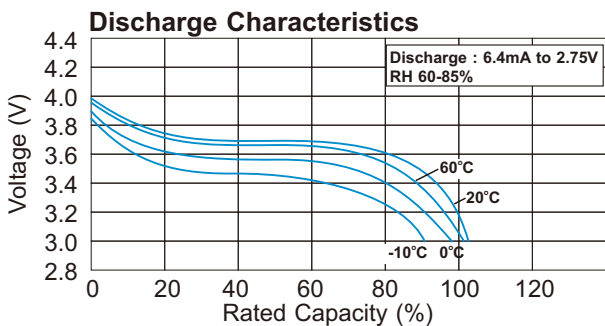
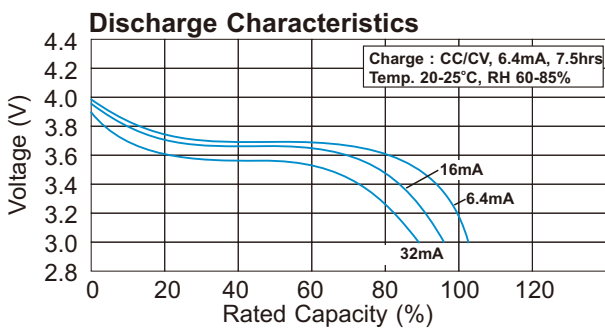


LITHIUM-ION RECHARGEABLE COIN CELL

SPECIFICATIONS

Model	:	LIR1632H
Description	:	Lithium-Ion Rechargeable Coin Cell
Nominal Capacity	:	32mAh (Min. 30) at 6.4mA discharge
Nominal Voltage	:	3.70 Volt
Cut-Off Voltage	:	2.75 Volt
Weight	:	~1.7 gram
Life Duration	:	Over 500 cycles at 0.2C mA discharge
Charge	:	Standard - CC at 6.4mA to 4.2V, then CV at 4.2V to current < 1.6mA Fast - CC at 16mA to 4.2V, then CV at 4.2V to current < 1.6mA
Max. Discharge Current	:	16mA
Temperature Environment	:	Standard Charge 0 degC to 45 degC Discharge -20 degC to 60 degC Storage -10 degC to 35 degC
Internal Impedance	:	<900 mOhm (Full Charge, test at 1000Hz)
Appearance	:	No leakage, No remarkable scratch, flaws or discoloration. No explosion under standard operating condition
Battery Maintenance	:	Battery stored and not used under room temperature for over 6 months have to be recharged.

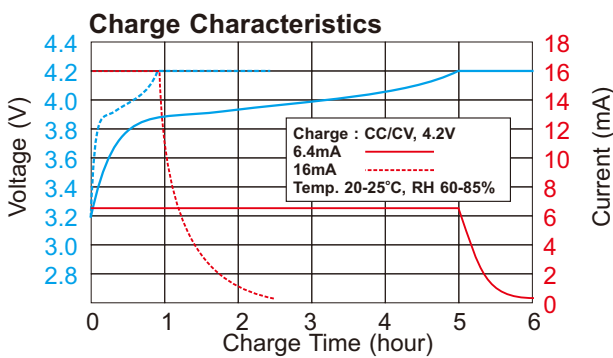

Information is for reference only and is not construed as warranties either expressed or implied, of future performance. Performance varies with time, discharge and storage condition.. 1 year limited guarantee against manufacturing defects. Other problem caused by misuse, mishandling of cell, or malfunction of equipment, is not under the warranty.