



**Features**

- Radial Leaded Devices
- Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirements
- Bulk packaging, or tape and reel available on most models

**Applications**

- Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:
- Industrial controls
  - Automotive electronics
  - Medical products

**Electrical Properties**

Model	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance			Agency Approval	
						Current (A)	Time (Sec)	R <sub>imin</sub> (Ω)	R <sub>imax</sub> (Ω)	R <sub>1max</sub> (Ω)	UL	TUV-PS
Bp100-060	60	40	0.10	0.20	0.38	0.50	4.0	2.50	4.50	7.50	✓	✓
Bp170-060	60	40	0.17	0.34	0.48	0.85	3.0	2.50	5.21	8.00	✓	✓
Bp200-060	60	40	0.20	0.40	0.41	1.00	2.2	1.25	2.75	4.40	✓	✓
Bp250-060	60	40	0.25	0.50	0.45	1.25	2.5	0.65	1.95	3.00	✓	✓
Bp300-060	60	40	0.30	0.60	0.49	1.50	3.0	0.45	1.33	2.10	✓	✓
Bp400-060	60	40	0.40	0.80	0.56	2.00	3.8	0.40	0.86	1.29	✓	✓
Bp500-060	60	40	0.50	1.00	0.77	2.50	4.0	0.35	0.77	1.17	✓	✓
Bp650-060	60	40	0.65	1.30	0.88	3.25	5.3	0.25	0.48	0.72	✓	✓
Bp750-060	60	40	0.75	1.50	0.92	3.75	6.3	0.20	0.40	0.60	✓	✓
Bp900-060	60	40	0.90	1.80	0.99	4.50	7.2	0.15	0.31	0.47	✓	✓
BpA01.10-060	60	40	1.10	2.20	1.50	5.50	8.2	0.13	0.25	0.38	✓	✓
BpA01.35-060	60	40	1.35	2.70	1.70	6.75	9.6	0.10	0.19	0.30	✓	✓
BpA01.60-060	60	40	1.60	3.20	1.90	8.00	11.4	0.07	0.14	0.22	✓	✓
BpA01.85-060	60	40	1.85	3.70	2.10	9.25	12.6	0.06	0.12	0.19	✓	✓
BpA02.50-060	60	40	2.50	5.00	2.50	12.50	15.6	0.04	0.08	0.13	✓	✓
BpA03.00-060	60	40	3.00	6.00	2.80	15.00	19.8	0.03	0.06	0.10	✓	✓
BpA03.75-060	60	40	3.75	7.50	3.20	18.75	24.0	0.02	0.05	0.08	✓	✓

**I<sub>hold</sub>** = Hold Current : maximum current device will sustain for 4 hours without tripping in 25°C still air.

**I<sub>trip</sub>** = Trip Current : minimum current at which the device will trip in 25°C still air.

**V<sub>max</sub>** = Maximum voltage device can withstand without damage at rated current (I<sub>max</sub>).

**I<sub>max</sub>** = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).

**P<sub>d</sub>** = Power dissipated from device when in the tripped state at 25°C still air.

**R<sub>i min/max</sub>** = Minimum/Maximum resistance of device in initial (un-soldered) state.

**R<sub>1 max</sub>** = Maximum resistance of device at 25°C measured one hour after tripping.

**CAUTION** : Operation beyond the specified ratings may result in damage and possible arcing and flame.

**Environmental Specifications**

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs	±5% typical
Humidity aging	+85°C, 85% R.H., 1000 hrs	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±10% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-202, Method 201	No change
Ambient operating /storage conditions : - 40 °C to +85 °C		
Maximum surface temperature of the device in the tripped state is 125 °C		

**Agency Approvals :**



**Regulation/Standard:**



2002/95/EC



EN14582


**WARNING:**

- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.

**Physical Dimensions (Unit: mm/inch)**

Model	A Max.	B Max.	C Typ.	D Min.	E Max.	F Max.	Lead Style
Bp100-060	7.4/0.29	12.7/0.50	5.1/0.20	7.6/0.3	3.1/0.12	1.0/0.04	Kink
Bp170-060	7.4/0.29	12.7/0.50	5.1/0.20	7.6/0.3	3.1/0.12	1.7/0.07	Kink
Bp200-060	7.4/0.29	12.7/0.48	5.1/0.20	7.6/0.3	3.1/0.12	1.0/0.04	Kink
Bp250-060	7.4/0.29	12.7/0.50	5.1/0.20	7.6/0.3	3.1/0.12	1.0/0.04	Kink
Bp300-060	7.4/0.29	13.0/0.51	5.1/0.20	7.6/0.3	3.1/0.12	1.0/0.04	Kink
Bp400-060	7.6/0.30	13.5/0.53	5.1/0.20	7.6/0.3	3.1/0.12	1.2/0.05	Kink
Bp500-060	7.9/0.31	13.7/0.54	5.1/0.20	7.6/0.3	3.1/0.12	1.2/0.05	Kink
Bp650-060	9.7/0.38	14.5/0.57	5.1/0.20	7.6/0.3	3.1/0.12	1.5/0.06	Kink
Bp750-060	10.4/0.41	15.2/0.60	5.1/0.20	7.6/0.3	3.1/0.12	1.5/0.06	Kink
Bp900-060	11.7/0.46	15.8/0.62	5.1/0.20	7.6/0.3	3.1/0.12	1.5/0.06	Kink
BpA01.10-060	13.0/0.51	18.0/0.71	5.1/0.20	7.6/0.3	3.1/0.12	1.2/0.05	Straight
BpA01.35-060	14.5/0.57	19.6/0.77	5.1/0.20	7.6/0.3	3.1/0.12	1.2/0.05	Straight
BpA01.60-060	16.3/0.64	21.3/0.84	5.1/0.20	7.6/0.3	3.1/0.12	1.5/0.06	Straight
BpA01.85-060	17.8/0.70	22.9/0.90	5.1/0.20	7.6/0.3	3.1/0.12	1.5/0.06	Straight
BpA02.50-060	21.3/0.84	26.4/1.04	10.2/0.40	7.6/0.3	3.1/0.12	1.7/0.07	Straight
BpA03.00-060	24.9/0.98	30.0/1.18	10.2/0.40	7.6/0.3	3.1/0.12	2.0/0.08	Straight
BpA03.75-060	28.5/1.12	33.5/1.32	10.2/0.40	7.6/0.3	3.1/0.12	2.0/0.08	Straight

**Dimensions**

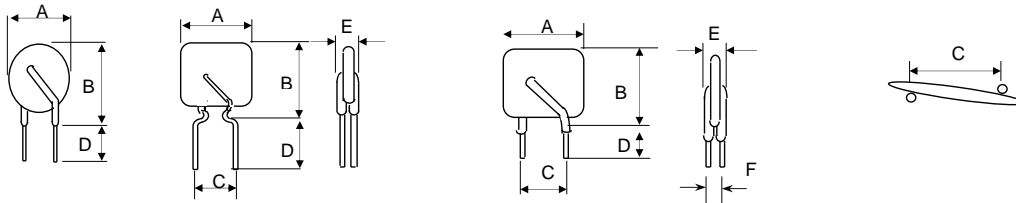

**Physical Characteristics**

**Lead Material :**

Bp100-060: Tin-plated nickel-copper alloy, 0.205mm<sup>2</sup> (24AWG), Φ0.51mm(0.020 in).


Bp170-060 ~ Bp400-060: Tin-plated copper-clad steel, 0.205mm<sup>2</sup> (24AWG), Φ0.51mm(0.020 in).

Bp500-060 ~ Bp900-060: Tin-plated copper, 0.205mm<sup>2</sup> (24AWG), Φ0.51mm(0.020 in).


BpA01.10-060 ~ BpA03.75-060: Tin-plated copper, 0.52mm<sup>2</sup> (20AWG), Φ0.81mm(0.032 in).

**Lead Solderability :** MIL-STD-202, Method 208E

**Typical time-to-trip curve at 25°C**

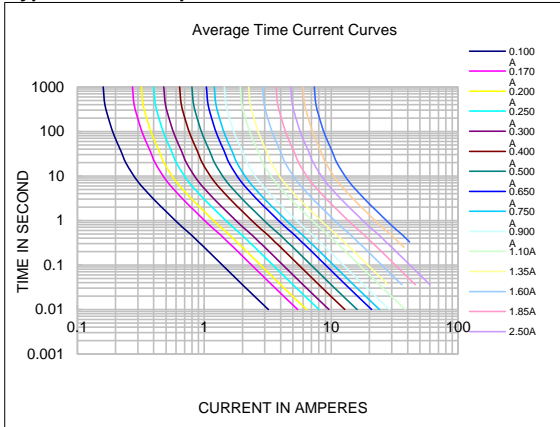

**Thermal derating curve**

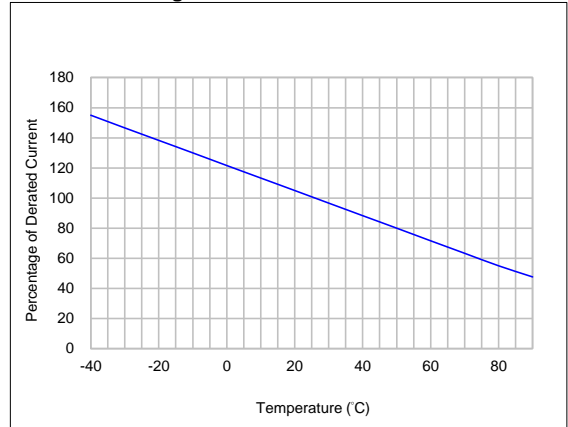

**$I_{hold}$  versus temperature**

Model	Maximum ambient operating temperature ( $T_{mao}$ ) vs. hold current ( $I_{hold}$ )									
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C	
Bp100-060	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.04	
Bp170-060	0.26	0.23	0.20	0.17	0.14	0.12	0.11	0.09	0.07	
Bp200-060	0.31	0.27	0.24	0.20	0.16	0.14	0.13	0.11	0.08	
Bp250-060	0.39	0.34	0.30	0.25	0.20	0.18	0.16	0.14	0.10	
Bp300-060	0.47	0.41	0.36	0.30	0.24	0.22	0.19	0.16	0.12	
Bp400-060	0.62	0.54	0.48	0.40	0.32	0.29	0.25	0.22	0.16	
Bp500-060	0.78	0.68	0.60	0.50	0.41	0.36	0.32	0.27	0.20	
Bp650-060	1.01	0.88	0.77	0.65	0.53	0.47	0.41	0.35	0.26	
Bp750-060	1.16	1.02	0.89	0.75	0.61	0.54	0.47	0.41	0.30	
Bp900-060	1.40	1.22	1.07	0.90	0.73	0.65	0.57	0.49	0.36	
BpA01.10-060	1.71	1.50	1.31	1.10	0.89	0.79	0.69	0.59	0.44	
BpA01.35-060	2.09	1.84	1.61	1.35	1.09	0.97	0.85	0.73	0.54	
BpA01.60-060	2.48	2.18	1.90	1.60	1.30	1.15	1.01	0.86	0.64	
BpA01.85-060	2.87	2.52	2.20	1.85	1.50	1.33	1.17	1.00	0.74	
BpA02.50-060	3.88	3.40	2.98	2.50	2.03	1.80	1.58	1.35	1.00	
BpA03.00-060	4.65	4.08	3.57	3.00	2.43	2.16	1.89	1.62	1.20	
BpA03.75-060	5.81	5.10	4.46	3.75	3.04	2.70	2.36	2.03	1.50	